E&K VINTAGE WOOD
FINE RECLAIMED WOOD

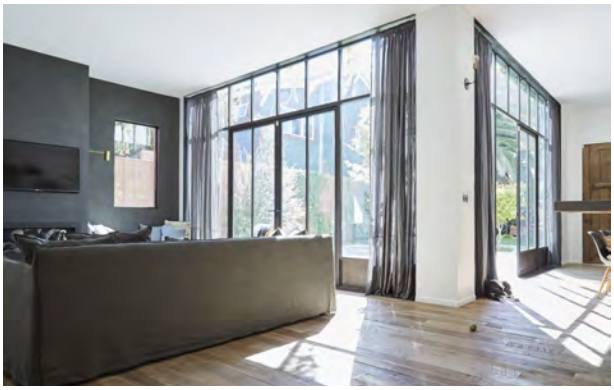

Hit or Miss Oak Flooring

Our reclaimed Hit or Miss Oak flooring preserves the inherent beauty of the Oak planks with a surface that highlights the distinctiveness of each board. This flooring style offers a charmingly rustic appearance, with some areas planed smooth while others are left rough Face, creating a subtle textural contrast that brings out the character of the wood.

Species:	Oak
Thickness:	5/8″ or 3/4″
Widths:	3″, 5″, 6 1/2″ , 8 1/2″, Random 3″–7″ and 5″–9″
Lengths:	2′–8′+
Milling:	Tongue and Groove, Relief in back, Microbevel
Surface:	Hit or Miss (Wire Brush Option)
Finish:	Oil and Water Based
Type:	Engineered or Solid

E&K WOOD

Sample Finishes

Santiago (FL523)

Cherbourg (FL677)



Cassis (FL322)



Adele (FL580)

E&K Vintage Wood | ekvintagewood.com | info@eankwood.com
1308 W El Segundo Blvd | Gardena, CA 90247 | (310)-306-6900

nwfa National Wood Flooring Association

Engineered Flooring: E&K offers all of its flooring as both engineered and solid

Product Name: Hit or Miss Oak Flooring plus name of the stain.

Species: Domestically sourced Reclaimed Oak.

Source: Old structures including barns, factories and residences that are deconstructed.

Color: Natural color of Hit or Miss Oak or custom stain.

Grade: Reclaimed wood is not officially graded. All material supplied is hand checked for usability. Holes and surface checks will be filled. There will be very little sapwood. Generally, there is a range from select grade to rustic grade. Certain floors are designed to be more rustic and others more refined.

Hit or Miss Oak Flooring

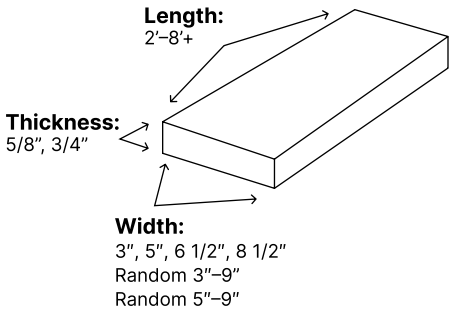

Dimensions Solid: Thickness: 5/8" or 3/4"; Width: 2"–9"+; wider widths upon request; Length 2'–8'+ (with most boards between 4' and 8') is standard; upon request, we can accommodate custom lengths.

Dimensions Engineered: Same as solid. Wear layer either 4mm or 6mm.

Milling: Tongue and groove. Relief on back of boards. If Unfinished, then square edge. If Pre-finished, then planks will have a Micro-bevel.

Finish: Custom for each order. See quote for details on finish if used.

Moisture Content: Flooring is kiln dried to 6–9% prior to milling. Material is kept in a stable moisture environment while being processed. For shipping, all flooring is wrapped to keep moisture levels stable during transit.

Surface: The materials start with a rough sawn face. These boards are then run through a planer with the planer's height set to create a look that combines both a rough and planed surfaces on the same board. The boards will be soft to the touch. There will be no boards that present any type of splintering. Every board is checked by hand to insure the usability of every board. Planed wood does not include saw marks. There may be present nail holes and surface checks that do not effect the integrity of the plank, both of these items will be filled with a suitable filler unless requested leave voids as is. There may be some evidence of insect marks which generally are in the form of pin holes. Knots will be present in varying sizes on some boards. There will not be an abundance of knots but some boards will have more knots and some none at all. All knots present will be sound knots. Chipped or damaged knots will either be patched or cut out. Grain pattern will be mixed and may include some quarter sawn, plain sawn and rift sawn grain patterns. There will be very little sap wood present.

Installation, Handling, and Storing: We recommend that installation, handling, storing, and prep of the jobsite all follow the guidelines established by the National Wood Flooring Association (www.nwfa.org). If you are not a NWFA member, we can supply technical guidelines upon request.

Overage: We recommend 5–10% overage, depending on the amount of cuts necessary and the need to have extra material to be able to reject certain boards for color.

Additional: If you have additional questions regarding any of the above or other items related to our floors, please contact us.