E&K VINTAGE WOOD
FINE RECLAIMED WOOD

## Pine Siding and Paneling

Crafted from wood with a rich history, our reclaimed Pine exterior Siding and interior Paneling transform any space. The natural weathering and patina of the wood lend an inviting ambiance. Every piece of reclaimed wood has unique grain patterns and subtle imperfections, adding texture and timeless appeal to modern design projects.

| | |
|---|---|
| Species: | Pine |
| Thickness: | 3/8″ to 3/4″ |
| Widths: | 3″, 5″, 6 1/2″, 8 1/2″, Random 3″–9″, Random 5″–9″ |
| Lengths: | 2′–8′+ |
| Milling: | Shiplap, Straight-Edge, Tongue and Groove |
| Surface: | Rough Sawn, Weathered |
| Finish: | Custom Finishes and Stains. Exterior siding is sealed. |
| Type: | Solid and Engineered |

E&K WOOD

## Sample Finishes

Barn Grey (SD1000)

Dayton (SD1076)

Barn Red (SD1001)

Barn White (SD1002)

E&K Vintage Wood | ekvintagewood.com | info@eandkwood.com
1308 W El Segundo Blvd | Gardena, CA 90247 | (310)-306-6900

nwfa National Wood Flooring Association

**Manufacturer:**
E&K Vintage Wood

**Species:**
Domestically sourced Reclaimed Pine.

**Source:**
Old structures, including barns, factories, and residences, that were deconstructed.

**Color:**
Light browns, reds, and greys. Custom stains available.

**Grade:**
Reclaimed wood is not officially graded. You should expect that all the material supplied will be usable. Holes and surface checks may be filled. There will be very little sap wood. Generally, there is a range from select grade to rustic grade.

Pine Siding and Paneling

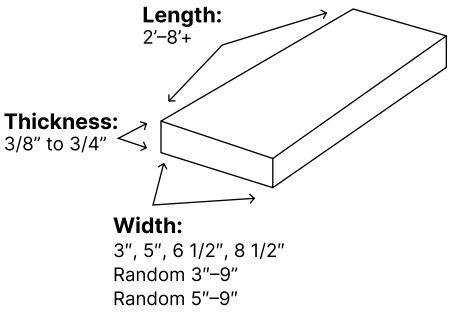


**Type:**
Our standard offering for Siding and Paneling is reclaimed solid wood. Engineered products are available upon request.

**Dimensions Solid:**
Thickness: 3/8" to 3/4", Width: 3", 5", 6 1/2", 8 1/2", Random 3"–9", Random 5"–9", Length 2–8'+ (with most boards between 4'–8') is standard. Upon request, we can accommodate custom lengths.

**Milling:**
Available Straight Edge, Shiplap, Tongue and Groove; with custom profiles available.



Straight Edge | Shiplap | Tongue and Groove

**Finish:**
Custom Finishes and Stains. Exterior siding is sealed.

**Moisture Content:**
Siding and Paneling is kiln dried to 6–9% prior to milling. Material is kept in a stable moisture environment while being processed. For shipping, all flooring is wrapped to keep moisture levels stable during transit.

**Surface:**
The materials start with an Original Rough Face or Weathered Face. The boards will be soft to the touch. There will be no boards that present any type of splintering. Every board is hand-checked to ensure its usability. Planed wood does not include saw marks. There may be nail holes present, discoloration, surface checks, and insect marks (pin holes). None of these items affect the integrity of the plank. Knots will be present in varying sizes on some boards. There will not be an abundance of knots, but some boards will have more knots, and some will have none at all. All knots present will be sound knots; chipped or damaged knots will either be patched or cut out. The grain pattern will be mixed and may include some quarter-sawn, plain-sawn, and rift-sawn grain patterns. There will be very little sap wood present.

**Installation, Handling, and Storing:**
We recommend that installation, handling, storing, and the prep of the job site all follow the guidelines established by the National American Architectural Woodwork Standards (https://naaws.com/). If you are not a member, we can supply technical guidelines upon request.

**Overage:**
We recommend 5–10% overage, depending on the amount of cuts necessary and the need to have extra material to be able to reject certain boards for color.

**Additional:**
If you have additional questions regarding any of the above or other items related to our floors, please contact us.