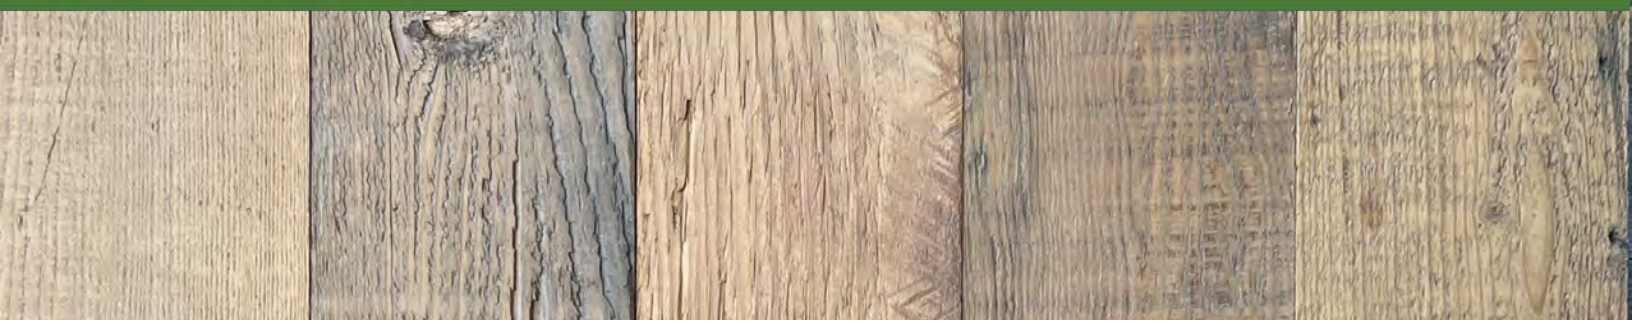

Rough Sawn Douglas Fir Flooring

Our reclaimed Rough Sawn Douglas Fir flooring showcases the natural beauty of the planks, featuring wavy grain patterns and the unique characteristics of each vintage board. Native to the North American West, each plank retains its Original Rough Face, giving this floor an authentic look and feel.

Species:	Douglas Fir
Thickness:	5/8″ or 3/4″
Widths:	3″, 5″, 6 1/2″, 8 1/2″, Random 3″–9″, Random 5″–9″
Lengths:	2′–8′+
Milling:	Tongue and Groove, Relief in back, Microbevel
Surface:	Rough Sawn
Finish:	Oil and Water Based
Type:	Engineered or Solid

Sample Finishes



Unfinished (FL490)

Huntington (FL333)

Ontario (FL688)

E&K Vintage Wood | ekvintagewood.com | info@eandkwood.com
1308 W El Segundo Blvd | Gardena, CA 90247 | (310)-306-6900

nwfa National Wood Flooring Association

Engineered flooring: E&K offers all of its flooring as both engineered and solid.

Rough Sawn Douglas Fir Flooring

Product Name: Rough Sawn Douglas Fir Flooring plus name of the stain.

Species: Domestically sourced Reclaimed Douglas Fir.

Source: Old structures including barns, factories and residences that are deconstructed.

Color: Natural color of Rough Sawn Douglas Fir or custom stain.

Grade: Reclaimed wood is not officially graded. All material supplied is hand checked for usability. Holes and surface checks will be filled. There will be very little sapwood. Generally there is a range from select grade to rustic grade. Certain floors are designed to be more rustic and others more refined.

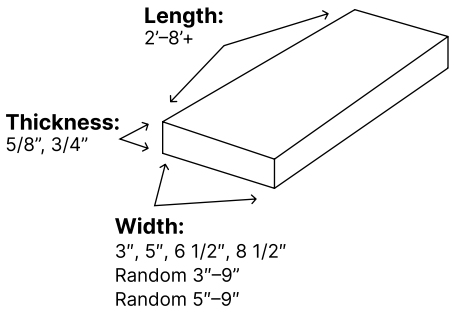

Dimensions Solid: Thickness: 5/8 or 3/4", Width: 3"–9"+, wider widths upon request, Length 2'–8'+ (with most boards between 4 - 8') is standard, upon request we can accommodate custom lengths.

Dimensions Engineered: Same as solid. Wear layer either 4mm or 6mm.

Milling: Tongue and groove. Relief on back of boards. If Unfinished, then square edge. If Pre-finished, then planks will have a Micro-bevel.

Finish: We have a wide range of custom finished products and in some cases create custom finishes for our clients.

Moisture Content: Flooring is kiln dried to 6–9% prior to milling. Material is kept in a stable moisture environment while being processed. For shipping all flooring is wrapped to keep moisture levels stable during transit.

Surface: The materials start with a rough sawn face. These boards are then lightly sanded to remove overt band saw marks, amount of sanding is adjusted based on the product's look. The boards will be soft to the touch. There will be no boards that present any type of splintering. Every board is checked by hand to insure its usability. Primarily saw marks are from circular saw blades, there may be some band saw marks as well. There may be present nail holes, surface checks that do not effect the integrity of the plank, both of these items will be filled with a suitable filler unless requested not to fill these voids. There may be some evidence of insect marks which generally are in the form of pin holes. There will not be a lot of insect holes. Knots will be present in varying sizes on some boards. There will not be an abundance of knots but some boards will have more knots and some none at all. All knots present will be sound knots. Chipped or damaged knots will either be patched or cut out.

Installation, Handling, and Storing: We recommend that installation, handling, storing, prep of job site all follow the guidelines established by the National Wood Flooring Association (www.nwfa.org). If you are not a member, we can supply technical guidelines upon request.

Overage: We recommend 5–10% overage depending on the amount of cuts necessary and depending on the need to have extra material to be able to reject certain boards for color.

Additional: If you have additional questions regarding any of the above or other items related to our floors, please contact us.