E&K VINTAGE WOOD
FINE RECLAIMED WOOD

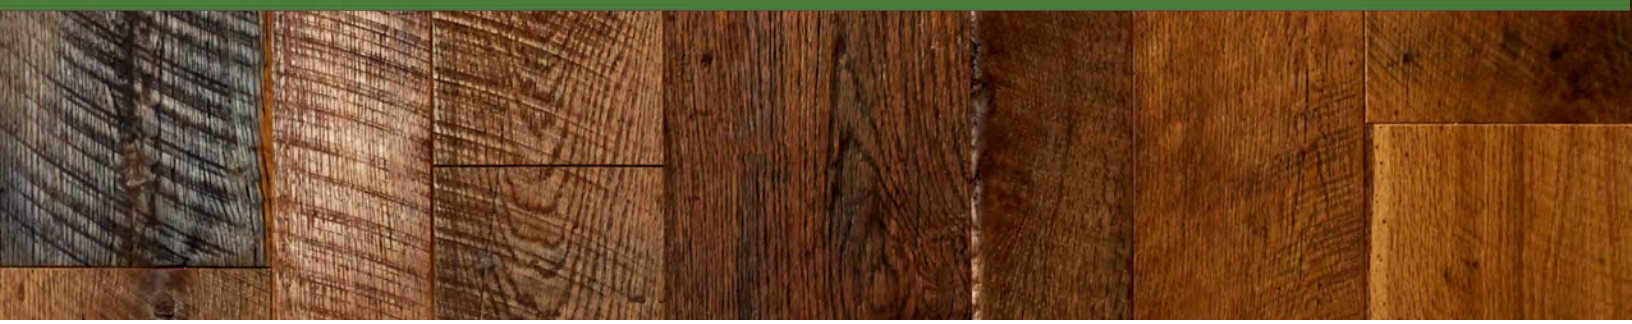

## Rough Sawn Oak Flooring

Our reclaimed Rough Sawn Oak flooring displays the authentic charm of the Oak planks, featuring a rough surface that accentuates the natural texture and distinct features of every board. Oak's rich and inviting hues lend a classic touch to any interior design scheme, while the rugged appearance adds an element of rustic appeal.

| | |
|---|---|
| Species: | Oak |
| Thickness: | 5/8″ or 3/4″ |
| Widths: | 3″, 5″, 6 1/2″ , 8 1/2″, Random 3″–7″ and 5″–9″ |
| Lengths: | 2′–8′+ |
| Milling: | Tongue and Groove, Relief in back, Microbevel |
| Surface: | Rough Sawn (Wire Brush Option) |
| Finish: | Oil and Water Based |
| Type: | Engineered or Solid |

E&K WOOD

## Sample Finishes

Andorra (FL509)



Nice (FL324)

Normandy (FL325)



Tangiers (FL420)

E&K Vintage Wood | ekvintagewood.com | info@eandkwood.com
1308 W El Segundo Blvd | Gardena, CA 90247 | (310)-306-6900

nwfa National Wood Flooring Association

**Engineered Flooring:** E&K offers all of its flooring as both engineered and solid.

**Rough Sawn Oak Flooring**

**Product Name:** Rough Sawn Oak Flooring plus name of the stain.

**Species:** Domestically sourced Reclaimed Oak and European on request.

**Source:** Old structures including barns, factories and residences, that are deconstructed.

**Color:** Natural color of Rough Sawn Oak or custom stain.

**Grade:** Reclaimed wood is not officially graded. All material supplied is hand checked for usability. Holes and surface checks will be filled. There will be very little sapwood. Generally, there is a range from select grade to rustic grade. Certain floors are designed to be more rustic and others more refined.

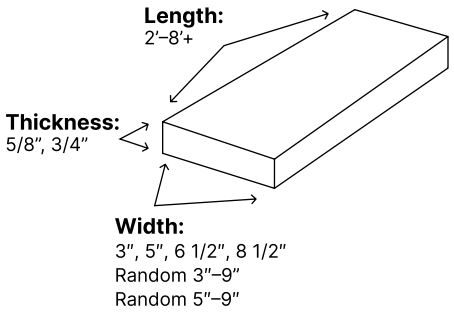


**Dimensions Solid:** Thickness: 5/8" or 3/4"; Width: 3"–9"+; wider widths upon request; Length 2'–8'+ (with most boards between 4' and 8') is standard; upon request, we can accommodate custom lengths.

**Dimensions Engineered:** Same as solid. Wear layer is either 4mm or 6mm.

**Milling:** Tongue and groove. Relief on back of boards. If Unfinished, then square edge. If Pre-finished, then planks will have a Micro-bevel.

**Finish:** Custom for each order. See quote for details on finish if used.

**Moisture Content:** Flooring is kiln dried to 6–9% prior to milling. Material is kept in a stable moisture environment while being processed. For shipping, all flooring is wrapped to keep moisture levels stable during transit.

**Surface:** The materials start with a rough sawn face. These boards are then lightly sanded to remove overt band saw marks, amount of sanding is adjusted based on the product's look. The boards will be soft to the touch. There will be no boards that present any type of splintering. Every board is checked by hand to ensure its usability. There may be nail holes and surface checks that do not affect the integrity of the plank; both of these items will be filled with a suitable filler unless the customer requests to leave voids as is. There may be some evidence of insect marks, which are generally in the form of pin holes. Knots will be present in varying sizes on some boards. There will not be an abundance of knots, but some boards will have more knots and some none at all. All knots present will be sound knots. Chipped or damaged knots will either be patched or cut out. The grain pattern will be mixed and may include some quarter-sawn, plain-sawn, and rift-sawn grain patterns. There will be very little sapwood present.

**Installation, Handling, and Storing:** We recommend that installation, handling, storing, and prep of the jobsite all follow the guidelines established by the National Wood Flooring Association (www.nwfa.org). If you are not a NWFA member, we can supply technical guidelines upon request.

**Overage:** We recommend 5 - 10% overage depending on the amount of cuts necessary and depending on the need to have extra material to be able to reject certain boards for color.

**Additional:** If you have additional questions regarding any of the above or other items related to our floors, please contact us.