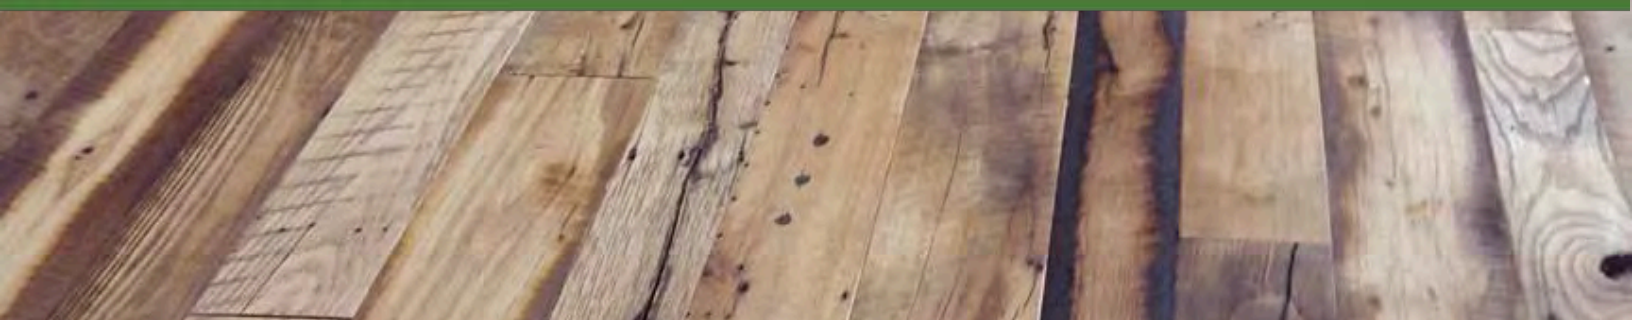

Rough Sawn, Planed, Hit or Miss Mixed Hardwood Flooring

Our Finished Mixed Hardwoods Reclaimed Flooring will add rustic Americana charm to your next project. Vintage Barn Boards are revitalized and transformed into beautiful reclaimed wood flooring. E&K's Mixed Hardwood flooring is a uniquely custom reclaimed wood flooring collection.

Species:	Mixed Hardwood
Thickness:	5/8″ or 3/4″
Widths:	3″, 5″, 6 1/2″ , 8 1/2″, Random 3″–7″ and 5″–9″
Lengths:	2′–10′+
Milling:	Tongue and Groove, Relief in back, Microbevel
Surface:	Rough Sawn, Planed, Hit or Miss (Wire Brush Option)
Finish:	Oil and Water Based
Type:	Engineered or Solid

Sample Finishes

Unfinished (FL493)

Lynchburg (FL722)

Montenegro (FL906)

Hallowell (FL629)

E&K Vintage Wood | ekvintagewood.com | info@eandkwood.com
1308 W El Segundo Blvd | Gardena, CA 90247 | (310)-306-6900

Engineered Flooring: E&K offers all of its flooring as both engineered and solid.

Product Name: Rough Sawn, Planed, Hit or Miss Mixed Hardwood Flooring plus name of the stain.

Species: Domestically sourced Reclaimed Mixed Hardwood.

Source: Old structures including barns, factories and residences that are deconstructed.

Color: Natural color of Mixed Hardwood or custom stain.

Grade: Reclaimed wood is not officially graded. All material supplied is hand checked for usability. Holes and surface checks will be filled. There will be very little sapwood. Generally, there is a range from select grade to rustic grade. Certain floors are designed to be more rustic and others more refined.

Mixed Hardwood Flooring

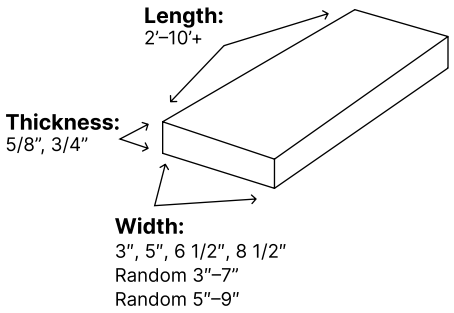

Dimensions Solid: Thickness: 5/8" or 3/4", Width: 3"–9"+, wider widths upon request, Length 2'–10'+ (with most boards between 4'–8') is standard; upon request, we can accommodate custom lengths.

Dimensions Engineered: Same as solid. Wear layer is either 4mm or 6mm.

Milling: Tongue and groove. Relief on back of boards. If Unfinished, then square edge. If Pre-finished, then planks will have a Micro-bevel.

Finish: Custom for each order. See quote for details on finish if used.

Moisture Content: Flooring is kiln dried to 6–9% prior to milling. Material is kept in a stable moisture environment while being processed. For shipping, all flooring is wrapped to keep moisture levels stable during transit.

Surface Options: *Planed* wood is planed and sanded, resulting in a smooth surface. Planed wood can also be wire brushed, which creates a more rustic look. *Rough Sawn* wood starts with rough sawn surface that is lightly sanded to remove overt band saw marks, and adjusted based on the product's look. *Hit or Miss* wood also starts with a rough sawn face. These boards are then run through a planer with the planer's height set to create a look that combines both rough and planed surfaces on the same board. All boards will be soft to the touch. There will be no boards that present any type of splintering. Every board is checked by hand to ensure its usability. There may be nail holes and surface checks that do not affect the integrity of the plank; both of these items will be filled with a suitable filler unless the customer requests to leave voids as is. There may be some evidence of insect marks, which are generally in the form of pin holes. Knots will be present in varying sizes on some boards. There will not be an abundance of knots, but some boards will have more knots and some none at all. All knots present will be sound knots. Chipped or damaged knots will either be patched or cut out. The grain pattern will be mixed and may include some quarter-sawn, plain-sawn, and rift-sawn grain patterns. There will be very little sapwood present.

Installation, Handling, and Storing: We recommend that installation, handling, storing, and prep of the jobsite all follow the guidelines established by the National Wood Flooring Association (www.nwfa.org). If you are not a NWFA member, we can supply technical guidelines upon request.

Overage: We recommend 5–10% overage, depending on the amount of cuts necessary and the need to have extra material to be able to reject certain boards for color.