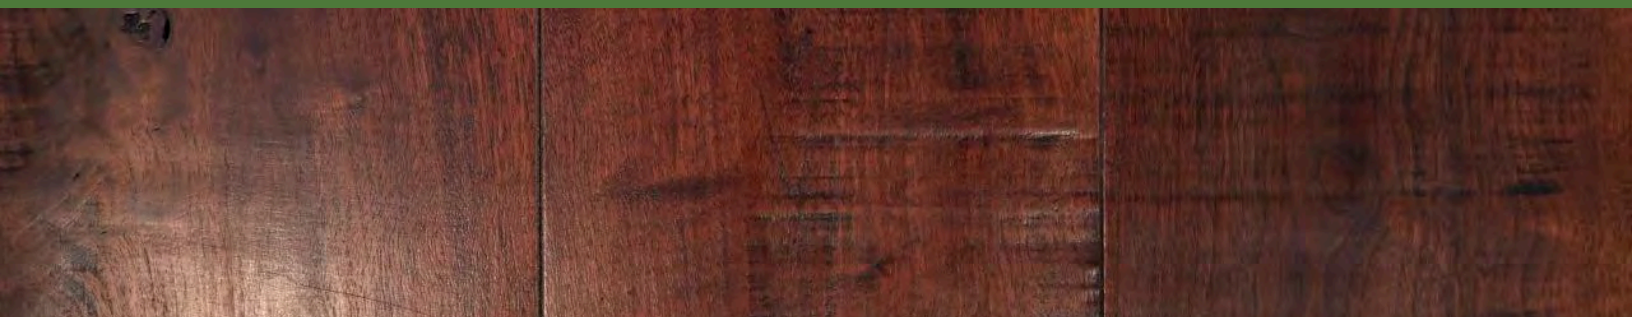

Planed and Hit or Miss Walnut Flooring

When only Finished Walnut Flooring will do, E&K offers the most exquisite range of surface colors for our Walnut Flooring. Find your sweet spot, from off-white to pale tan, old bronze, and on through to the expressive warmth of deep, dark chocolate tones.

Species:	Walnut
Thickness:	5/8″ or 3/4″
Widths:	3″, 5″, 6 1/2″, 8 1/2”, and 10″+
Lengths:	2′–10′+
Milling:	Tongue and Groove, Relief on back, Micro-bevel
Surface:	Planed, Hit or Miss (Wire Brush Option)
Finish:	Oil and Water Based
Type:	Engineered or Solid

E&K WOOD

Sample Finishes

Unfinished



Barcelona (FL547)

Biarritz (FL305)

Penmar (FL704)

E&K Vintage Wood | ekvintagewood.com | info@eandkwood.com
1308 W El Segundo Blvd | Gardena, CA 90247 | (310)-306-6900

nwfa National Wood Flooring Association

Engineered Flooring: E&K offers all of its flooring as both engineered and solid.

Product Name: Planed, Hit or Miss Walnut Flooring plus the name of the stain.

Species: Domestically sourced Walnut.

Color: Natural color of Walnut or custom stain, off-white, pale tan, old bronze, dark chocolate tones.

Grade: Walnut is not a reclaimed product. We offer Walnut in a variety of grades, from FAS to Number 2B Common. Refer to the National Hardwood Lumber Association (NHLA) for Walnut grading information.

Walnut Flooring

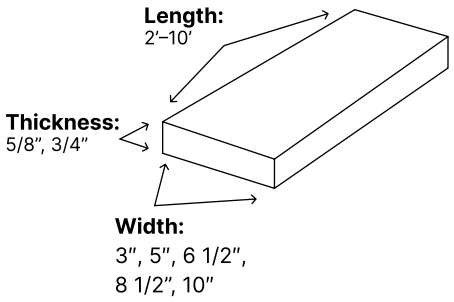

Dimensions Solid: Thickness: 5/8" or 3/4", Width: 3", 5", 6 1/2", 8 1/2", and 10", wider widths upon request. Length: 2'–10'+ (with most boards between 4'–8') is standard; upon request, we can accommodate custom lengths.

Dimensions Engineered: Same as solid. Wear layer either of 4mm or 6mm.

Milling: Tongue and groove. Relief on back of boards. If Unfinished, then square edge. If Pre-finished, then planks will have a micro-bevel.

Finish: Custom for each order. See quote for details on finish if used.

Moisture Content: Flooring is kiln dried to 6–9% prior to milling. Material is kept in a stable moisture environment while being processed. For shipping, all flooring is wrapped to keep moisture levels stable during transit.

Surface Options: *Planed* wood is planed and sanded, resulting in a smooth surface. and may include wire brushing, which creates a more rustic look. *Hit or Miss* wood starts with a rough sawn face. These boards are then run through a planer with the planer's height set to create a look that combines both rough and planed surfaces on the same board. All boards will be soft to the touch. There will be no boards that present any type of splintering. Every board is checked by hand to ensure its usability. There may be nail holes and surface checks that do not affect the integrity of the plank; both of these items will be filled with a suitable filler unless the customer requests to leave voids as is. There may be some evidence of insect marks, which are generally in the form of pin holes. Knots will be present in varying sizes on some boards. There will not be an abundance of knots, but some boards will have more knots, and some will have none at all. All knots present will be sound knots. Chipped or damaged knots will either be patched or cut out. The grain pattern will be mixed and may include some quarter-sawn, plain-sawn, and rift-sawn grain patterns. There will be very little sapwood present.

Installation, Handling, and Storing: We recommend that installation, handling, storing, and prep of the job site all follow the guidelines established by the National Wood Flooring Association (www.nwfa.org). If you are not a NWFA member, we can supply technical guidelines upon request.

Overage: We recommend 5–10% overage depending on the amount of cuts necessary and on the need to have extra material to be able to reject certain boards for color.

Additional: If you have additional questions regarding any of the above or other items related to our floors, please contact us.